


## PROIZVODI EPS-PGF podno grijanje

### PRIMJENA:

Primjenjuje se kao toplinska izolacija podova s podnim grijanjem.

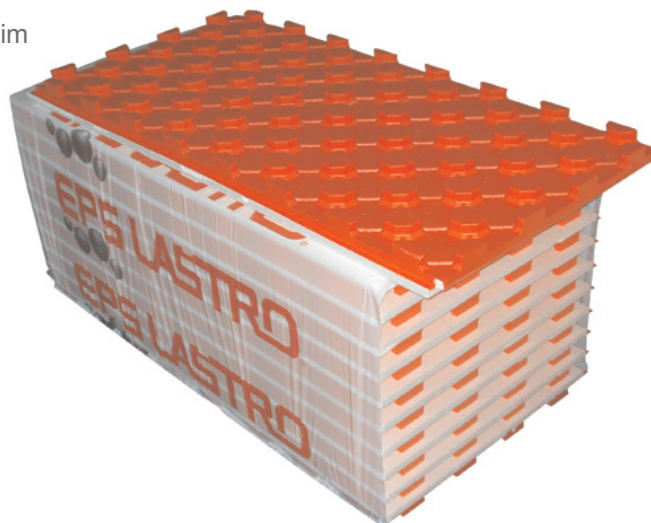

**0,035 W/mK**  
TOPLINSKA PROVODLJIVOST



**120 kPa**  
TLAČNA NOSIVOST



**170 kPa**  
ČVRSTOĆA NA POVIJANJE



**EN 13 163**  
STANDARD



**EURORAZRED E**  
KLASA GORIVOSTI



**60x120 cm**  
DIMENZIJE PLOČA



**PGF**  
FOLIJA



**m<sup>2</sup>/pak**  
PAKIRANJE

NAZIV	DEBLJINA	m <sup>2</sup> /pak	T. OTPOR
EPS-PGF	55	7,20	0,86 m <sup>2</sup> K/W