

EPS LASTRO

EKSPANDIRANI POLISTIREN (EPS)

PROIZVODI EPS-T

PRIMJENA:

Primjenjuje se kao **zvučna** izolacija plivajućih podova.



0,042W/mK
TOPLINSKA PROVODLJIVOST



30 kPa
TLAČNA NOSIVOST



120 kPa
ČVRSTOĆA NA POVIJANJE



20 MN/m³
DINAMIČKA KRUTOST



EN 13 163
STANDARD




EURORAZRED E
KLASA GORIVOSTI



ZELENA
OZNAKA NA RUBU PLOČE



50x100 cm
DIMENZIJE PLOČA

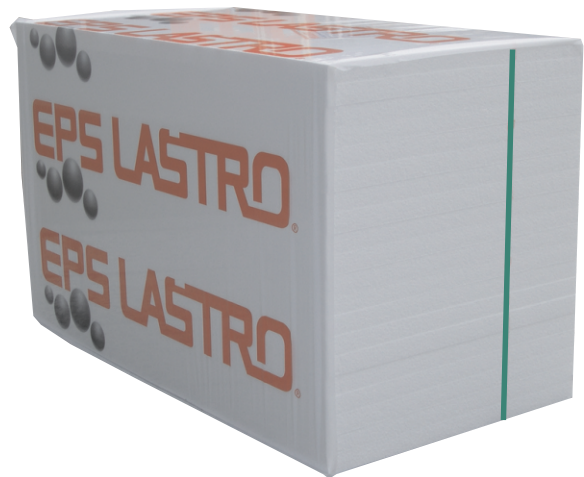

m²/pak
PAKIRANJE

NAZIV	DEBLJINA	m ² /pak	T. OTPOR
EPS-T/2	20	15	0,48 m ² K/W
EPS-T/3	30	10	0,71 m ² K/W